

Complete fixing sets for free-standing toilets and bidets



BUILDING MATERIALS

- Concrete
- Solid sand-lime brick
- Natural stone with dense structure
- Solid brick made from lightweight concrete
- Solid brick

APPROVALS



ADVANTAGES


- Complete fixing sets including brass screws allow for quick and easy installation.
- A pronounced rim prevents contact between the screw and ceramics, thus ensuring nothing gets damaged during fixing.
- The WB5N's assembly bracket with pre-drilled rows of holes allows for a flexible fixing with two directions.
- The WCN is also suitable for fixing ceramic shelves and mirrors, and can thus be used for a wide range of applications.

APPLICATIONS

- Free-standing
- toilets Bidets
- Ceramic shelves
- Mirrors

FUNCTIONING

- S8RD is suitable for push-through installation.
- WCN and S8D are suitable for both pre-positioned and push-through installation.
- The WB5N's assembly bracket is flexibly positioned on the base using the long hole. The ceramics are then fixed to the bracket via the rows of holes. These counterbalance any height differences in the ceramic assembly holes.

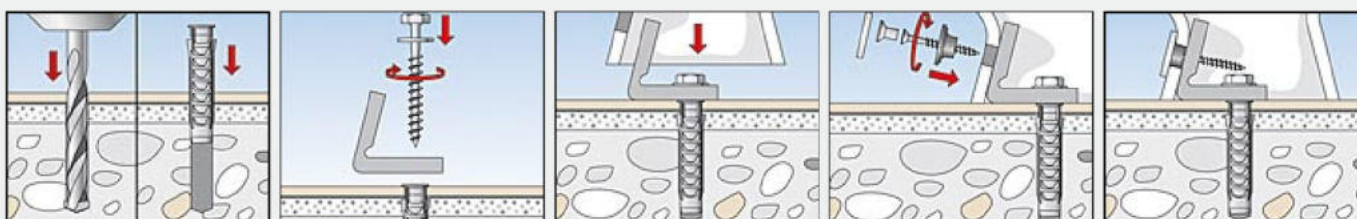

TECHNICAL DATA



WC fixing WB 5N

Type	Art.- No.	Contents
WB 5N	018652	2 S plugs SX 10, 2 Screws 7x65 zinc-plated, 2 Nylon angles, 2 washers 8mm, 2 screws A2 stainless steel, 2 flanged sleeves, 2 cover caps chrom

Complete fixing sets for free-standing toilets and bidets



BUILDING MATERIALS

- Concrete
- Solid sand-lime brick
- Natural stone with dense structure
- Solid brick made from lightweight concrete
- Solid brick

APPROVALS



ADVANTAGES


- Complete fixing sets including brass screws allow for quick and easy installation.
- A pronounced rim prevents contact between the screw and ceramics, thus ensuring nothing gets damaged during fixing.
- The WB5N's assembly bracket with pre-drilled rows of holes allows for a flexible fixing with two directions.
- The WCN is also suitable for fixing ceramic shelves and mirrors, and can thus be used for a wide range of applications.

APPLICATIONS

- Free-standing
- toilets Bidets
- Ceramic shelves
- Mirrors

FUNCTIONING

- S8RD is suitable for push-through installation.
- WCN and S8D are suitable for both pre-positioned and push-through installation.
- The WB5N's assembly bracket is flexibly positioned on the base using the long hole. The ceramics are then fixed to the bracket via the rows of holes. These counterbalance any height differences in the ceramic assembly holes.

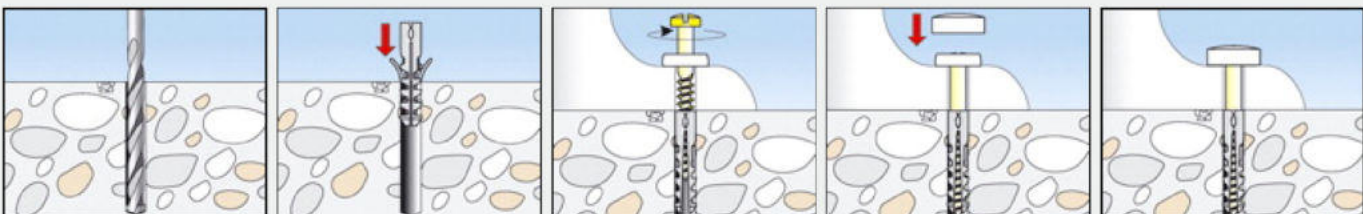

TECHNICAL DATA



Sanitary fixing set S 8 D 70 WCR

Type	Art. -	Contents per plastic bag [pcs]
S 8 D 70 WCR	No. 060564	2 wall plugs S 8, 2 brass screws 6 x 70 6kt., 2 cover caps chrome and white, 2 snap-fit sleeves

Complete fixing sets for wash basins, urinals and sanitary installations



BUILDING MATERIALS

- Concrete
- Gypsum plasterboard and gypsum fibreboards
- Vertically perforated brick
- Hollow blocks made from lightweight concrete
- Cavity floor slabs made from bricks and concrete or similar
- Perforated sand-lime brick
- Solid sand-lime brick
- Natural stone
- Aerated concrete
- Chipboard
- Solid panel made from gypsum
- Solid brick made from lightweight concrete
- Solid brick

APPROVALS



ADVANTAGES


- Complete fixing sets allow for quick and easy installation.
- The universal plug UX can be used in all solid, hollow and board materials, thus offering a high level of flexibility.
- Flanged nuts and collar sleeves made of high-strength nylon are resistant to ageing and chemicals, and guarantee a long-lasting fixing that will not damage the ceramics.
- Cover caps with a high-quality chrome finish ensure the fixture remains visually attractive for a long period of time.

APPLICATIONS

- Wash basins
- Urinals
- Built-in toilets
- Boilers
- Gas heaters
- Cisterns

FUNCTIONING

- The rimless UX is suitable for pre-positioned and push-through installation.
- Screwing in the screw causes the UX to expand in the solid building material and to knot within the cavity.
- Maximum load-bearing capacity is only achieved when the screw is screwed in so far that the spanner flat lies on the plug rim.
- Tiles and plaster are not classed as load-bearing base materials.

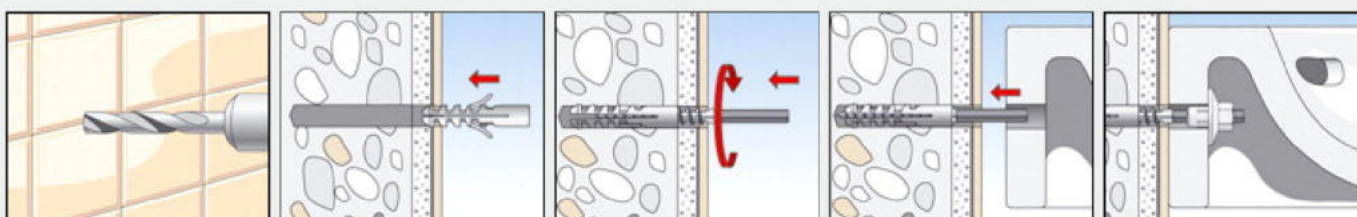

TECHNICAL DATA



Wash basin and urinal fixing WD

Type	Art. -	Contents per plastic bag [pcs]
WD 10 x 120	No.	2 wall plugs UX 14 x 75, 2 stud screws M 10x120 zinc-plated, 2 flanged nuts BU M10 MH, installation instructions
WD 10 x 140	080655	2 wall plugs UX 14 x 75, 2 stud screws M 10x140 zinc-plated, 2 flanged nuts BU M10 MH, 2 hexagon nuts M10, installation instructions
WD 8 x 110	080656 080658	2 wall plugs UX 10 x 60, 2 stud screws M 8x110 zinc-plated, 2 flanged nuts BU M8
WD 8 x 90	080659	2 wall plugs UX 10 x 60, 2 stud screws M 8x90 zinc-plated, 2 flanged nuts BU M8, installation instructions